


C SERIES

# ECONOMICAL ERGONOMIC FUNCTIONAL

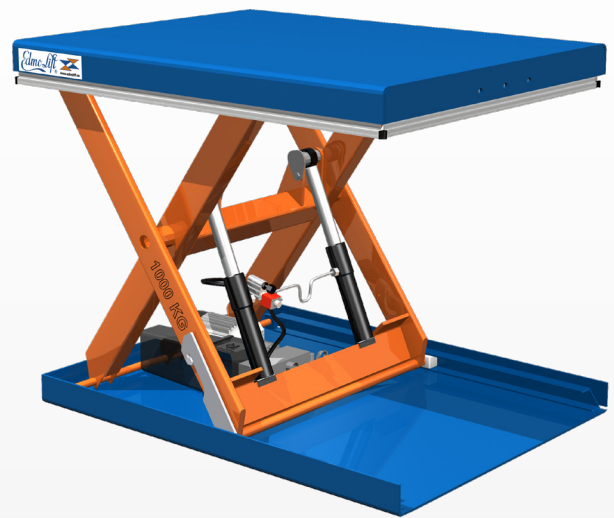

## LIFT SOLUTIONS CAN BE FOUND AT EDMOLIFT

EdmoLift's C series has been developed to provide unrivalled value for money! Many of the essential components, including the hydraulics, are identical to those found in our T series. These products have a powder coat finish to guarantee a quality, hardwearing surface.

With a variety of applications and models, lift capacity from 200 kilo to two metric tons and a lift range from 600 mm to 1170 mm, we can offer a wide range of lifts in the C series.

Models in the C series can only be manufactured as standard and cannot be customised or adapted to perform special operations. The functionality of the product can, however, be increased

with accessories such as a forklift frame or mobile base frame. The hydraulic power pack can be provided in 1- or 3 phase execution.

EdmoLift's C series is not designed to be used for continuous operations on the production line or such like.

### CZ LIFT TROLLEY

EdmoLift's C series of lift trolleys provide excellent assistance to the working day. Stable, single and double scissors are an integral part of the range, with a load capacity of between 150 kilo and 500 kilos and a table height from 920 mm to 1620 mm. These trolleys are delivered with large easily manoeuvrable wheels

complete with double brakes on the swivelling wheels.

The lift trolleys are used wherever there is a need for lifting, assembly, transportation or where you require an adjustable working height. Perfect for simple material handling.

And as always with our C products – we guarantee unrivalled value for money!

C series is available on a 24 hour delivery service.

At EdmoLift you can find solutions for all your lifting problems.

## SINGLE SCISSORS



Model	Art.no	Capacity kg	Lift stroke mm	Closed height mm	Length mm	Width mm	Lift time sec	kW	Weight incl. packaging	Notes
CR 500	36473	500	600	160	900	600	12	0,37	110	
CR 1000	515215	1000	600	160	900	700	23	0,37	130	
CL 1001**	36045	1000	820	180	1200	800	15/26	0,75	180	
CL1500	524827	1500	820	200	1300	1200	17	1,5	255	
CL 2000	36474	2000	820	200	1300	800	17	1,5	250	
CB 1200	524828	1200	1000	210	1500	1200	17	1,5	305	
CB 1500	36475	1500	1000	210	1500	800	17	1,5	275	
CB 1500B	36478	1500	1000	210	1500	1000	17	1,5	300	

\*\*1-phase or 3-phase

## VERTICAL DOUBLE SCISSORS



Model	Art.no	Capacity kg	Lift stroke mm	Closed height mm	Length mm	Width mm	Lift time sec	kW	Weight incl. packaging	Notes
CRD 200	36472	200	1170	280	900	600	12	0,37	125	
CLD 1500	518584	1500	1420	360	1300	850	29	1,5	320	

## LIFT TROLLEYS



Model	Art.no	Capacity kg	Max height mm	Min height mm	Length mm	Width mm	Platform mm	Height adjustment			Weight kg pack. incl
								Power	Battery	Charger	
CZ 203	524674	200, Foot p.	920	320	1150	650	900 x 600	Foot p.	—	—	65
CZ 503	521448	500, Foot p.	920	320	1150	650	900 x 600	Foot p.	—	—	75
CZD 203	521449	200, Foot p.	1620	450	1150	650	900 x 600	Foot p.	—	—	85

### CE- or Type 2B declaration

We construct and manufacture our lift tables and lift trolleys in accordance with the basic requirements in the Lift table standards EN 1570-1 and the Lift trolley standards SS-EN ISO 3691-5:2009. We comply with the requirements in accordance with Machine, Low voltage and the EMC directive. The products are delivered after being tested with CE certification and the assurance of agreement or in certain cases the manufacturer's Type 2B declaration.



## LOW PROFILE TABLES



Model	Art.no	Capacity kg	Lift stroke mm	Closed height mm	Length mm	Width mm	Lift time sec	Power	Weight incl. packaging	Notes
CCB 1000*	34860	1000	720	80	1500	800	13	0,75	225	
CCB 1000B*	35395	1000	720	80	1500	1000	13	0,75	235	
CCB 1000XB	524834	1000	720	80	1500	1200	13	0,75	310	

\*External powerpack in box.

## LOW PROFILE U-SHAPED



Model	Art.no	Capacity kg	Lift stroke mm	Closed height mm	Length mm	Width mm	Lift time sec	Power	Weight incl. packaging	Notes
CUB 1000*	34858	1000	720	80	1450	1085	13	0,75	240	

\*External powerpack in box.

Width between the forks: 585 mm

## PRODUCT FEATURES C SERIES SCISSOR LIFT

- ◆ Load capacity max 2000 kg.
- ◆ Lift range 600 mm to 1170 mm
- ◆ Lift table length from 900 mm to 1500 mm.
- ◆ Complies with European safety standard EN 1570-1 – CE certified.
- ◆ 24 V DC control unit and operating device with deadman's switch.
- ◆ IP54 approved electrical system.
- ◆ Safety spacing between all moving parts.
- ◆ Overload protection.
- ◆ Adjustable trap prevention safety trip bars on all four sides of the platform.
- ◆ The table is equipped with hose burst valves and mechanical locks for service and maintenance.
- ◆ User manual in 20 different languages.

### CE- or Type 2B declaration

We construct and manufacture our lift tables and lift trolleys in accordance with the basic requirements in the Lift table standards EN 1570-1 and the Lift trolley standards SS-EN ISO 3691-5:2009. We comply with the requirements in accordance with Machine, Low voltage and the EMC directive. The products are delivered after being tested with CE certification and the assurance of agreement or in certain cases the manufacturer's Type 2B declaration.

